




Part Number	Description	Material	Finish	Patent
CF70	2.50" Sch 40 HDG Continuous Flight Helical Pile w/ NPT Threads, 70" Long	ASTM A500 Grade C	Hot-Dipped Galvanized to ASTM A123/A123M	Patent Pending
CF84	2.50" Sch 40 HDG Continuous Flight Helical Pile w/ NPT Threads, 84" Long			
CF126	2.50" Sch 40 HDG Continuous Flight Helical Pile, 126" Long			

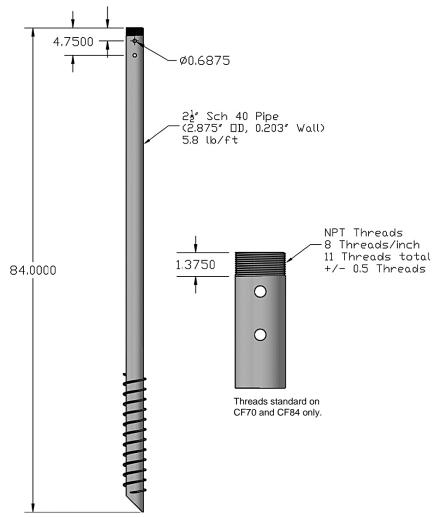

2½" Schedule 40 Round Pile Section Properties				
Axis X-X Value	Value			
I (Moment of Inertia)	1.450 in <sup>4</sup>			
S (Section Modulus)	1.010 in <sup>3</sup>			
r (Radius of Gyration)	0.952 in			
Z (Plastic Modulus)	1.370 in <sup>3</sup>			
Axis Y-Y Value	Value			
I (Moment of Inertia)	1.450 in <sup>4</sup>			
S (Section Modulus)	1.010 in <sup>3</sup>			
r (Radius of Gyration)	0.952 in			
Z (Plastic Modulus)	1.370 in <sup>3</sup>			
Outside Diameter	2.875 in			
Wall Thickness	0.203 in			
Area	1.590 in <sup>2</sup>			
Weight	5.813 lb/lf			
Installation Torque Factor	8-9			
Axial Compressive Load Limit	47,000 lbs			
Axial Tensile Load Limit	47,000 lbs			
Torsional Installation Limit	5,000 ft-lb			
Max Developed Axial Capacity	40,000 lbs			
Max Lateral Load Capacity	2,300 lbs			